SERIES UAG

SINGLE STAGE RESIDENTIAL LOW INTENSITY INFRARED HEATER





SERIES UAG SINGLE STAGE LOW INTENSITY INFRARED HEATER

Designed and approved for residential use. Featuring the best overall performance in the industry. The Series UAG will keep your garage and vehicles warm even during the coldest days.

- · High radiant factor
- High energy efficiency
- Design flexibility
- Competitively priced
- Deco grille available for a more sophisticated look



SERIES UAG INFRARED HEATERS



INFRARED BENEFITS

- Quiet, comfortable and efficient heat source
- No air or dust is blown around
- The heat is directed where needed the most
- Gentle and efficient heat distribution



ELECTRIC	CAL RAT	ING
120 VA	C 60 Hz 1	Δ

Plug Connector

GAS CONNECTION

1/2" NPT

STANDARD EQUIPMENT INCLUDES

- Burner housing assembly
- Aluminized heat treated heat exchanger
- Tubulators when required
- Combustion air inlet collar
- All tube, reflectors, couplings end caps and hanging accessories per specified length

TUBE DIAMETER

Combustion air 4" Flue 4"


MINIMUM GAS INLET

Natural gas 5.0" W.C LPG Gas 11.5" W.C

OPTIONAL EQUIPMENT

- Residential Kit: Gas flex hose and shut off, thermostat, 4" vent terminal, fresh air inlet hood, and wall thimble
- Other Accessories: Side reflectors, bottom shields, chain kit, U or L bends, deco grille.

DIMENSIONS (Inches)

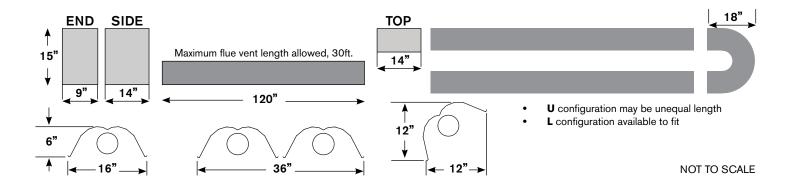

CONFIGURATIONS							
Model NG or LPG	RATE BTU/HR	MIN. LENGTH (FT)	MAX. LENGTH (FT)				
UAG-40	40,000	10	20				
UAG-60	60,000	20	30				

CLEARANCE TO COMBUSTIBLES (IN)

Model	UAG-40			UAG-60				
Configuration	Α	В	С	D	Α	В	С	D
Horizontal	2	18	45	18	2	25	58	25
45° Tilt	4	4	40	38	4	4	50	46

Visit our website for I/O manual, specifications, and submittal data.















Superior Radiant Products Inc. 315 N Madison Street Fortville, IN 46040 USA

1 800 527 HEAT(4328) | tel 1 905 664 8274 | fax 1 905 664 8846 sales@superiorradiant.com | www.superiorradiant.com

SAVING ENERGY FOR FUTURE GENERATIONS

